



**KE8-E extended  
arithmetic element  
engineering drawings**





This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

DIA KE8-E-Ø 2

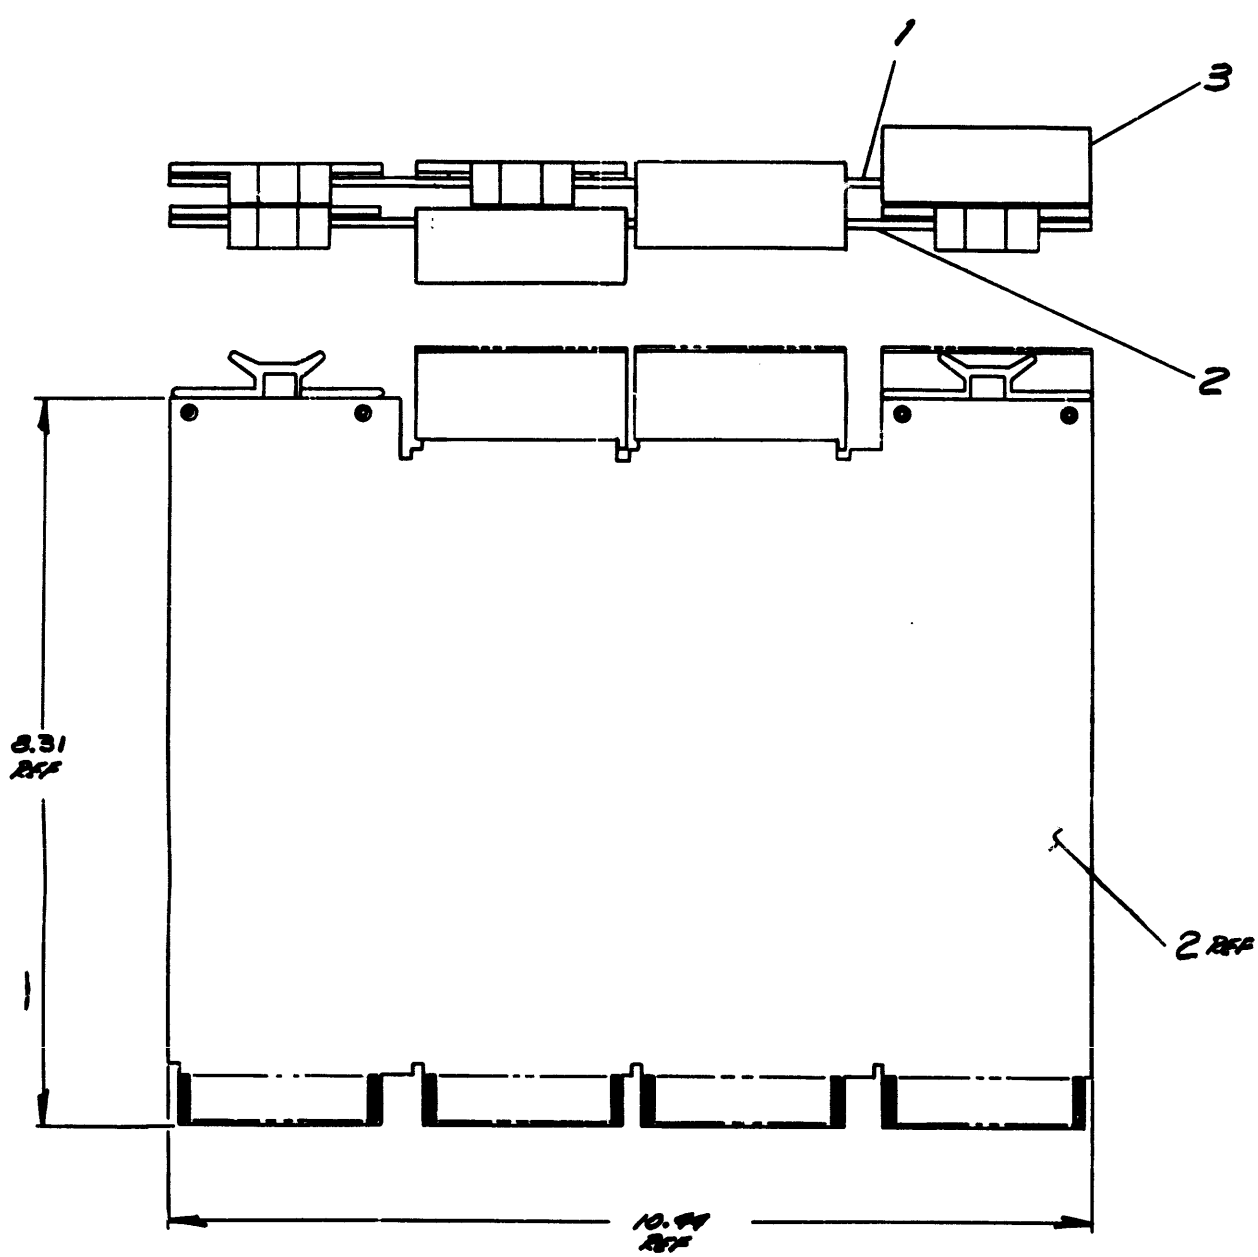

REV	
CHANGE NO.	
CHK	


DEC FORM NO 8  
ORD 100-A

FIRST USED ON OPTION/MODEL <b>PDP8-E</b>	QTY.	DESCRIPTION	PART NO.	ITEM NO.
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES. TOLERANCES	DATE <i>[Signature]</i> 7/21/71	DATE 7/21/71	<b>digital</b> EQUIPMENT CORPORATION MAYNARD, MASSACHUSETTS	
DECIMALS .005 .XX .02 .X .1	DATE 8/18/71	DATE 8/18/71		
ANGLES ±0° 30'	DATE 8/18/71	DATE 8/18/71	TITLE <b>EXTENDED ARITH ELEMENT</b>	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY ✓	DATE 8/18/71	DATE 8/18/71		
MATERIAL	NEXT HIGHER ASSY.	SCALE	SIZE CODE <b>DIA KE8-E-Ø</b>	NUMBER
FINISH	SHEET 1 OF 1	DIST.		REV.

DIA KE8-E-Ø





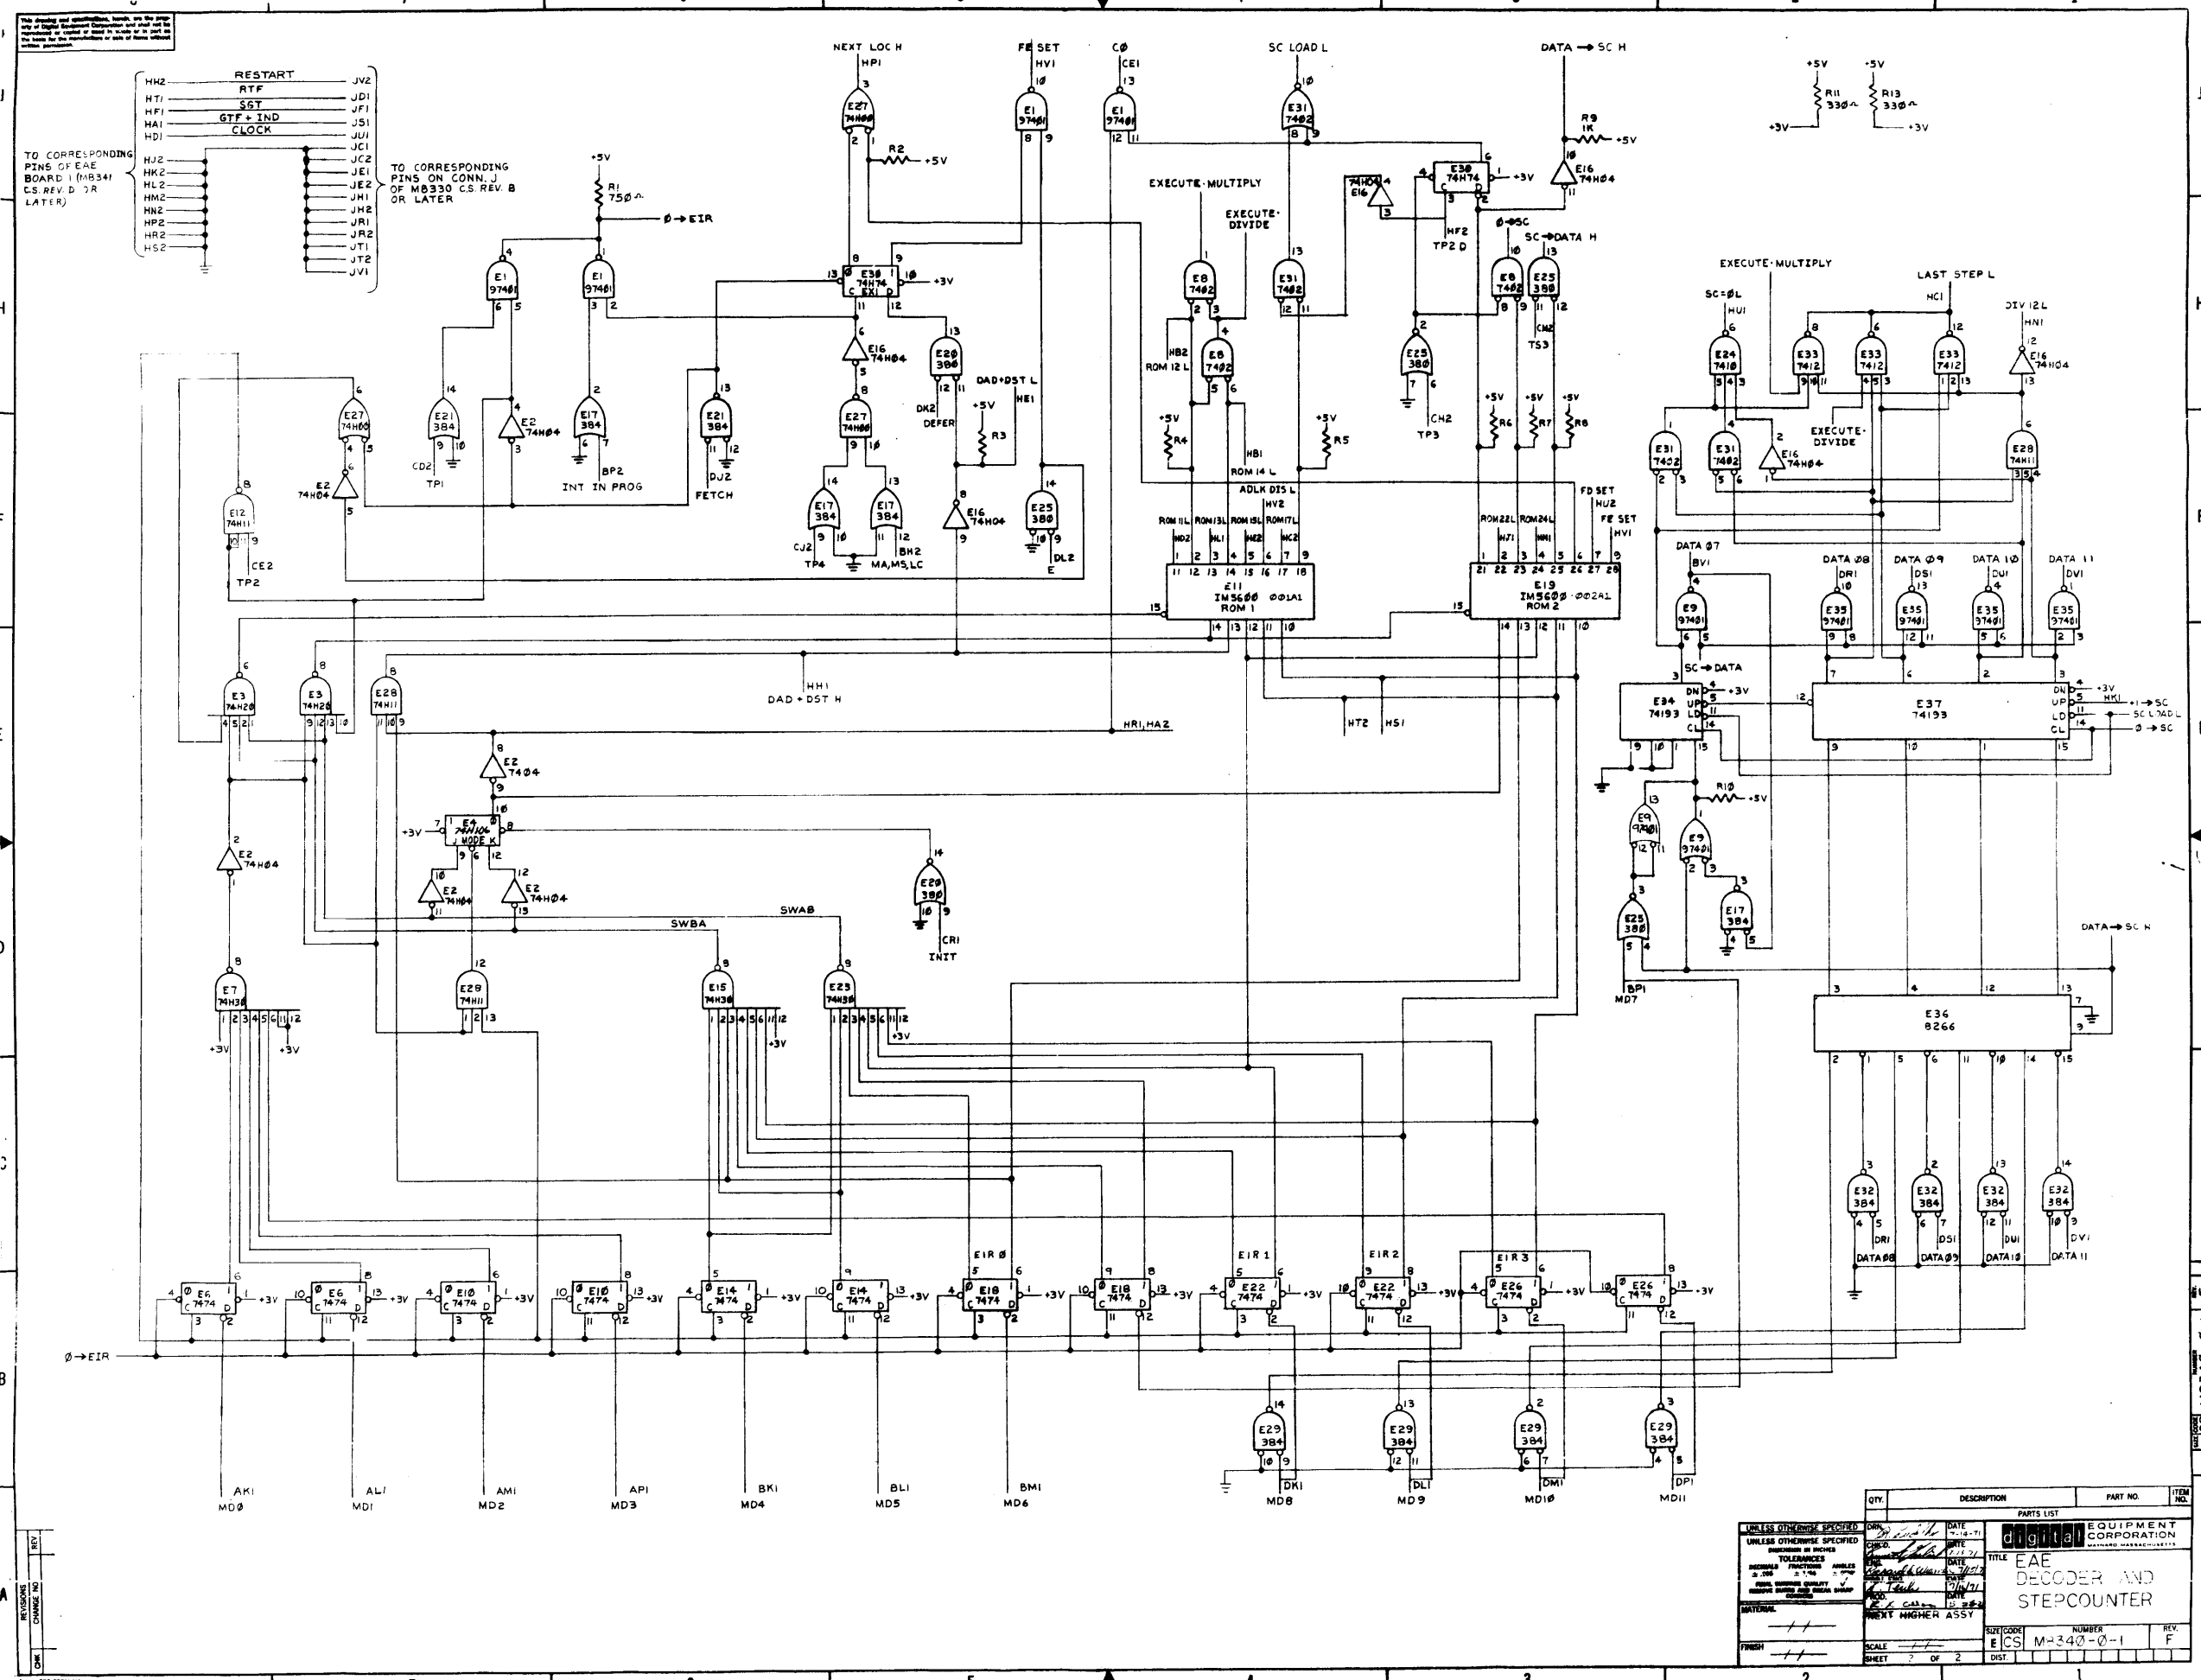


TO CORRESPONDING PINS OF EAE BOARD I (M8341 C.S. REV. D OR LATER)

RESTART  
 RTF  
 SET  
 GTF + IND  
 CLOCK

TO CORRESPONDING PINS ON CONN. J OF M8330 C.S. REV. B OR LATER

REVISION CHANGE NO. REV.

QTY.	DESCRIPTION	PART NO.	ITEM NO.
	PARTS LIST		
	EQUIPMENT		
	digital CORPORATION		
	TITLE		
	EAE DECODER AND		
	STEP-COUNTER		
	SCALE	NUMBER	REV.
	ECS M-340-0-1	F	
	SHEET 2 OF 2	DIST.	

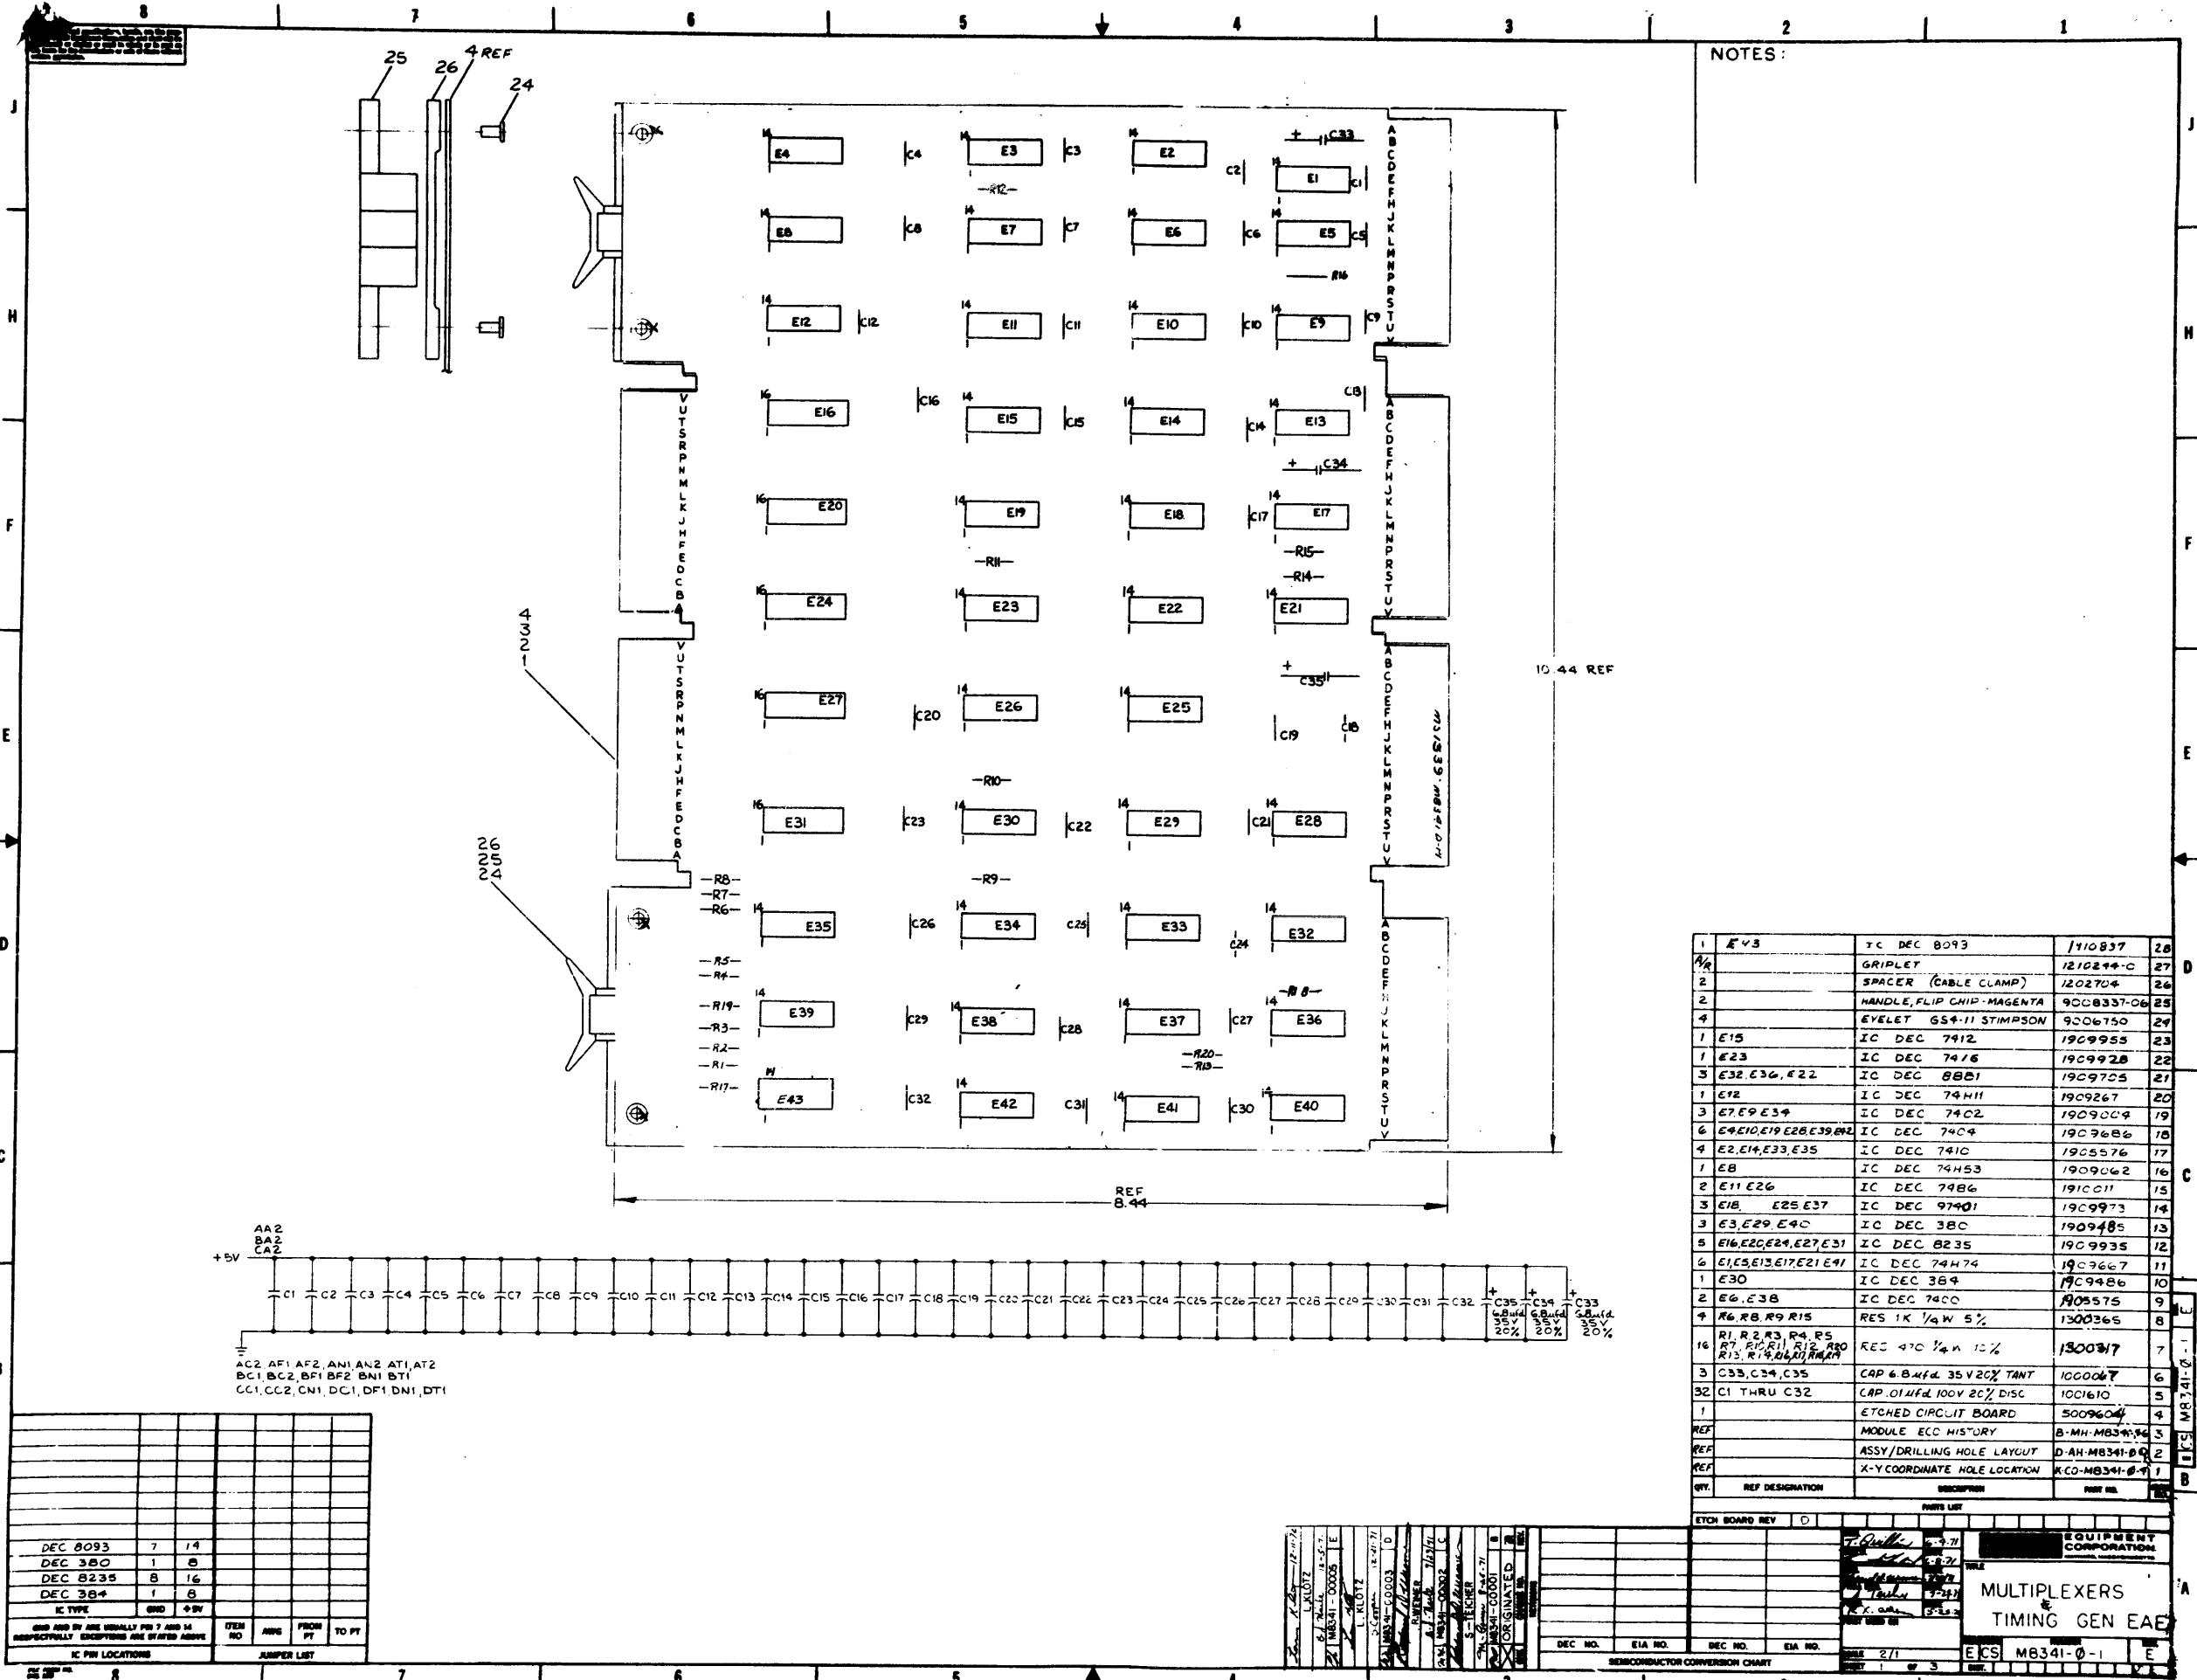

NOTES:

1	E13	IC DEC 8093	1110837	28
2		GRIPLEY	1210244-C	27
2		SPACER (CABLE CLAMP)	1202704	26
2		HANDLE, FLIP CHIP-MAGENTA	9008337-06	25
4		EYELET 654-11 STIMPSON	9006750	24
1	E15	IC DEC 7412	1909955	23
1	E23	IC DEC 7416	1909928	22
3	E32, E36, E22	IC DEC 88B1	1909705	21
1	E12	IC DEC 7411	1909267	20
3	E7, E9, E34	IC DEC 7402	1909004	19
6	E10, E19, E28, E38, E2	IC DEC 7404	1909686	18
4	E2, E14, E33, E35	IC DEC 7410	1905576	17
1	E8	IC DEC 7453	1909062	16
2	E11, E26	IC DEC 7486	1910011	15
3	E18, E25, E37	IC DEC 97401	1909973	14
3	E3, E29, E40	IC DEC 38C	1909485	13
8	E16, E20, E24, E27, E31	IC DEC 8235	1909935	12
6	E15, E13, E17, E21, E41	IC DEC 74474	1909667	11
1	E30	IC DEC 384	1909486	10
2	E6, E38	IC DEC 7400	1905575	9
4	R6, R8, R9, R15	RES 1K 1/4W 5%	1300265	8
16	R1, R2, R3, R4, R5, R7, R10, R11, R12, R20, R13, R14, R16, R17, R18	RES 470 1/4W 10%	1300317	7
3	C33, C34, C35	CAP 6.8uFd 35V 20% TANT	1000067	6
32	C1 THRU C32	CAP. 01uFd 100V 20% DISC	1001610	5
1		ETCHED CIRCUIT BOARD	5009604	4
REF		MODULE ECC HISTORY	B-MH-MB341-0-1	3
REF		ASSY/DRILLING HOLE LAYOUT	D-AH-MB341-0-1	2
REF		X-Y COORDINATE HOLE LOCATION	K-CO-MB341-0-1	1

DEC 8093	7	14
DEC 380	1	8
DEC 8235	8	16
DEC 384	1	8
IC TYPE	QND	QBV
QND AND QBV ARE USUALLY PIN 7 AND 14 RESPECTIVELY EXCEPTING ARE SHOWN ABOVE	ITEM NO	AVG
IC PIN LOCATIONS	FROM PT	TO PT
JUMPER LIST		

ETCH BOARD REV 0

DATE 2/1

SEMICONDUCTOR CONVERSION CHART


EQUIPMENT CORPORATION

MULTIPLEXERS  
TIMING GEN EAE

ECS M6341-0-1





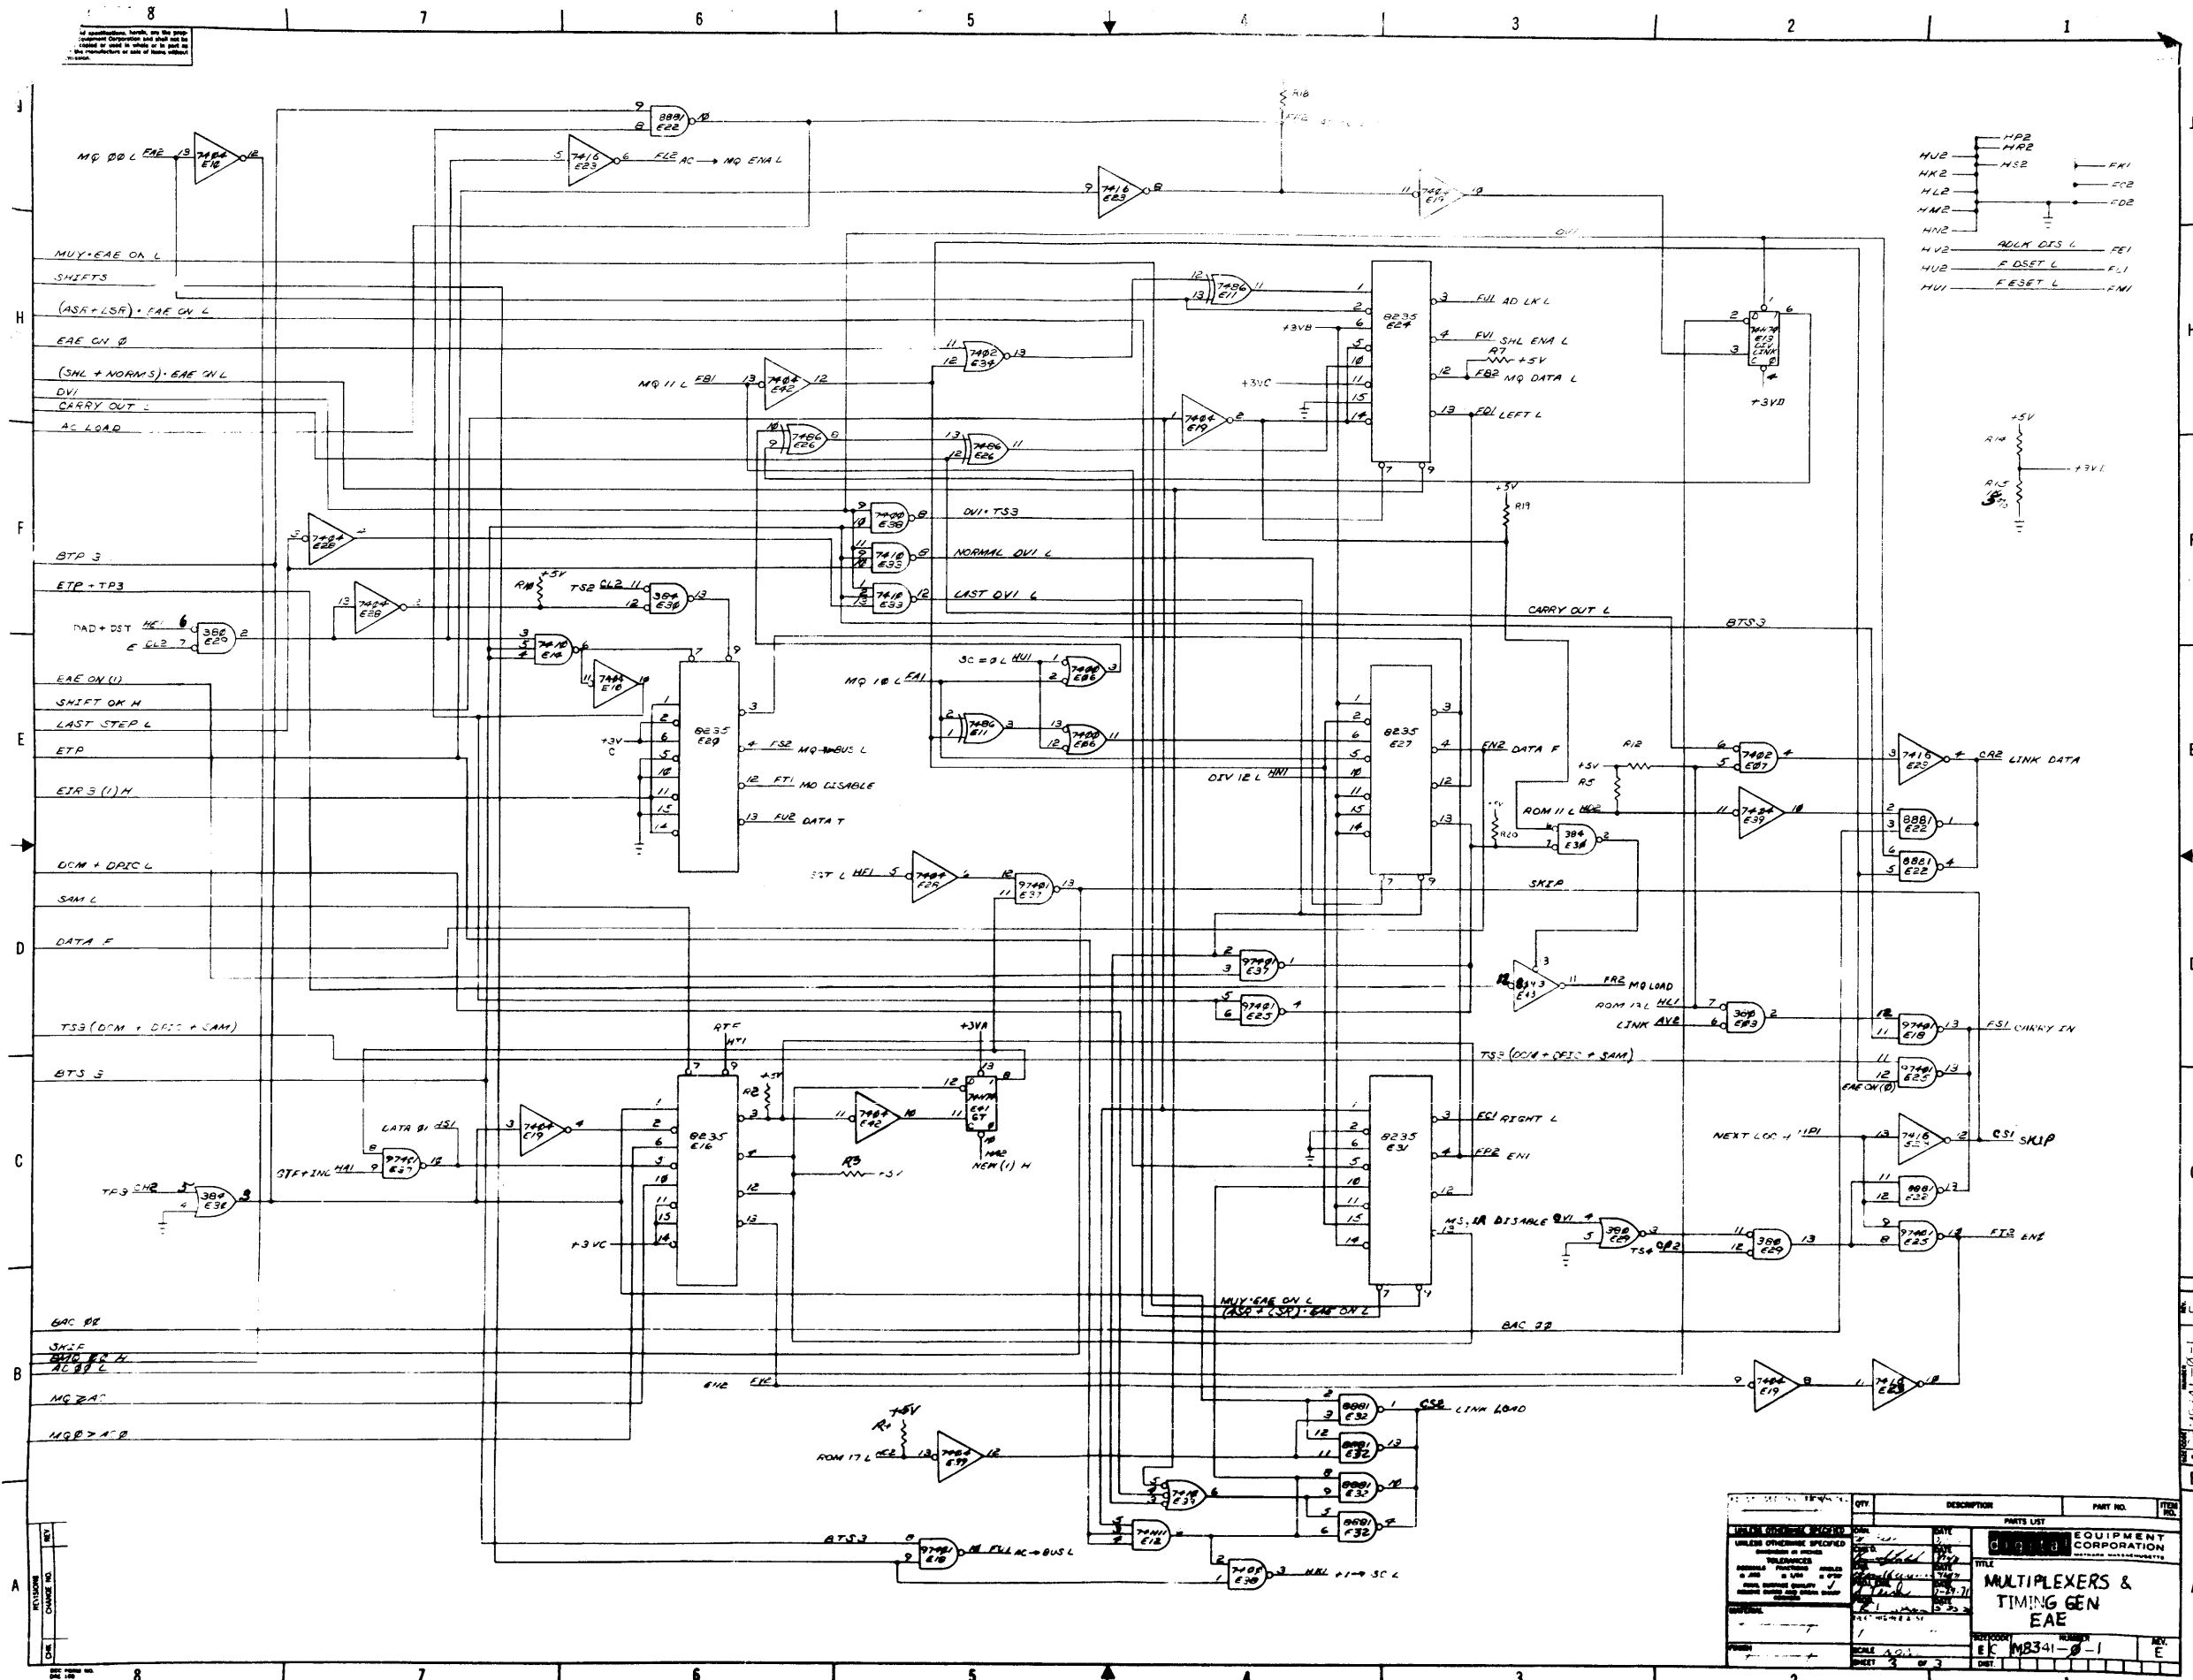

QTY	DESCRIPTION	PART NO.	REV.
1	7410	7410	
1	7411	7411	
1	7412	7412	
1	7413	7413	
1	7414	7414	
1	7415	7415	
1	7416	7416	
1	7417	7417	
1	7418	7418	
1	7419	7419	
1	7420	7420	
1	7421	7421	
1	7422	7422	
1	7423	7423	
1	7424	7424	
1	7425	7425	
1	7426	7426	
1	7427	7427	
1	7428	7428	
1	7429	7429	
1	7430	7430	
1	7431	7431	
1	7432	7432	
1	7433	7433	
1	7434	7434	
1	7435	7435	
1	7436	7436	
1	7437	7437	
1	7438	7438	
1	7439	7439	
1	7440	7440	
1	7441	7441	
1	7442	7442	
1	7443	7443	
1	7444	7444	
1	7445	7445	
1	7446	7446	
1	7447	7447	
1	7448	7448	
1	7449	7449	
1	7450	7450	
1	7451	7451	
1	7452	7452	
1	7453	7453	
1	7454	7454	
1	7455	7455	
1	7456	7456	
1	7457	7457	
1	7458	7458	
1	7459	7459	
1	7460	7460	
1	7461	7461	
1	7462	7462	
1	7463	7463	
1	7464	7464	
1	7465	7465	
1	7466	7466	
1	7467	7467	
1	7468	7468	
1	7469	7469	
1	7470	7470	
1	7471	7471	
1	7472	7472	
1	7473	7473	
1	7474	7474	
1	7475	7475	
1	7476	7476	
1	7477	7477	
1	7478	7478	
1	7479	7479	
1	7480	7480	
1	7481	7481	
1	7482	7482	
1	7483	7483	
1	7484	7484	
1	7485	7485	
1	7486	7486	
1	7487	7487	
1	7488	7488	
1	7489	7489	
1	7490	7490	
1	7491	7491	
1	7492	7492	
1	7493	7493	
1	7494	7494	
1	7495	7495	
1	7496	7496	
1	7497	7497	
1	7498	7498	
1	7499	7499	
1	7500	7500	

EQUIPMENT CORPORATION  
 TITLE  
**MULTIPLEXERS & TIMING GEN EAE**  
 PART NO. EC M8341-0-1  
 REV. E

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.


REV. B  
 SIZE CODE UA  
 NUMBER H851-0-0

2

1

B

B

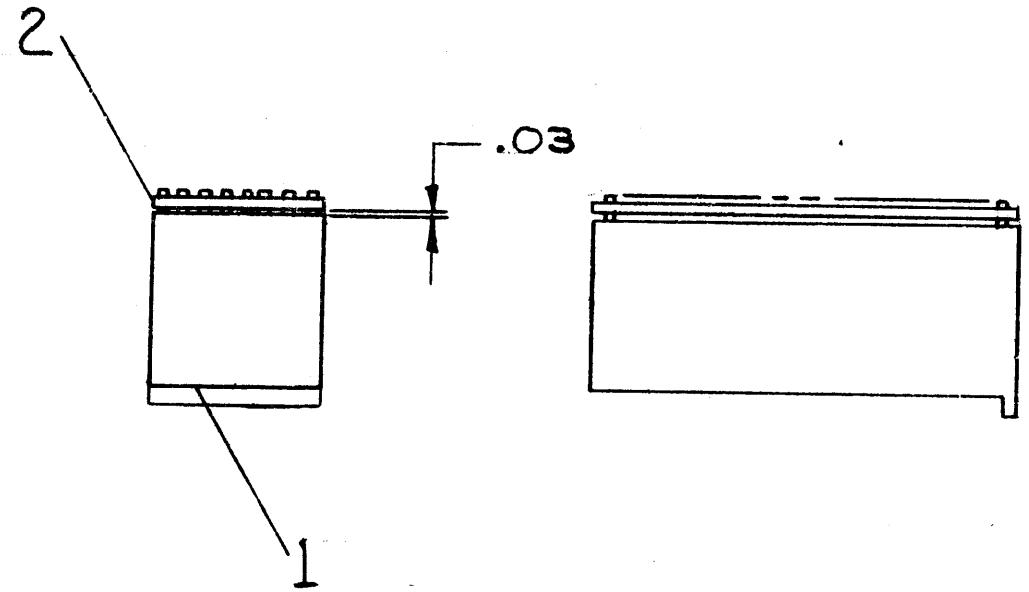

REF	DESCRIPTION	PART NO.	ITEM NO.
REF	MODULE ECO HISTORY	B-MH-H851-0-6	5
REF	ASSY HOLE LAYOUT	C-AH-H851-0-5	4
REF	CIRCUIT SCHEMATIC	B-CS-H851-0-1	3
1	ETCH BOARD	D-IA-5008903-0-0	2
1	CONN BLOCK, 72 PIN	1210152	1

FIRST USED ON OPTION/MODEL H851	UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES ANGLES ± 0°30'
MATERIAL — # —	FINAL SURFACE QUALITY REMOVE BURRS AND BREAK SHARP CORNERS
FINISH — # —	PROJ. ENG. DATE 8-13-70
	PROD. DATE 8-13-70
	SCALE — # —
	SHEET 1 OF 1

TOLERANCES DECIMALS	
.XXX	= ± .005
.XX	= ± .02
.X	= ± .1

REVISIONS	CHANGE NO.	REV.
	H851-00001	A
	12-10-70	
	P. GARDNER	
	12-14-70	
	H851-00002	B
	B. Naile	8-3-72
	P. GARDNER	
	John Brune for P. G. 8-9-72	

DEC FORM NO. DRB 100

**digital** EQUIPMENT CORPORATION  
 MAYNARD, MASSACHUSETTS

TITLE  
 H851  
 EDGE CONNECTOR

SIZE CODE B UA NUMBER H851-0-0 REV. B  
 DIST. G

4

2

↑

2

1



NOTES:  
 1. IF ANY CHANGES ARE TO BE MADE TO THIS PRINT  
 FIRST CHECK WITH PURCHASE SPECS A-PS-23-001A1  
 AND A-SP-23 002A1.

ROM 1  
 ENABLE IF MAJOR STATE = F OR E  
 EIR 3 → A  
 EIR 2 → B  
 EIR 1 → C  
 EIR 0 • NEW → D  
 EXECUTE → E

ROM 2  
 ENABLE IF MAJOR STATE = F  
 EIR 3 → A  
 EIR 2 → B  
 EIR 1 → C  
 EIR 0 → D  
 OLD → E

FUNCTION	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8	OCTAL
F • NOP	1	1	1	1	1	1	1	1	377
F • SCL	1	1	1	1	1	1	1	1	377
F • MUY	1	1	1	1	1	0	0	1	371
F • DVI	1	1	1	1	1	1	1	1	377
F • SHL	0	1	1	0	0	0	1	1	143
F • ASR	1	1	1	1	1	0	0	1	377
F • LSR	1	1	1	1	1	0	0	1	371
F • SCA	1	1	1	1	1	1	1	1	377
F • DAD	1	1	1	1	1	0	0	1	371
F • DST	1	1	1	1	1	1	1	1	377
F • NOP	1	1	1	1	1	1	1	1	377
F • DPSZ	1	1	1	1	1	1	1	1	377
F • DPIC	1	0	0	1	1	0	0	1	231
F • DCM	1	0	0	1	1	0	0	1	231
F • SAM	1	1	0	1	1	0	0	1	331
E • NOP	1	1	1	1	1	1	1	1	377
E • SCL	1	1	1	1	1	1	1	0	376
E • MUY	1	0	1	1	1	1	1	1	267
E • DVI	1	0	1	0	0	0	0	1	241
NOT USED									X
E • SHL	0	1	1	0	0	0	1	0	142
E • ASR	1	1	1	1	1	0	1	0	366
E • LSR	1	1	1	1	1	1	1	0	366
NOT USED									X
E • DAD	1	1	0	1	1	0	0	1	331
E • DST	1	1	1	1	1	1	1	1	377
NOT USED									X
NOT USED									X
NOT USED									X
NOT USED									X

FUNCTION	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8	OCTAL
NOP	1	1	1	1	1	1	1	1	377
ACS	0	1	1	1	1	1	1	1	177
NEW MUY	1	1	0	1	1	0	0	1	331
NEW DVI	1	1	0	1	1	0	0	1	331
NMI	1	1	0	1	1	1	1	1	337
SHL	1	1	1	1	1	0	1	0	372
ASR	1	1	1	1	1	0	1	0	372
LSR	1	1	1	1	1	0	1	0	372
SCA	1	1	1	1	0	1	1	1	367
DAD	1	1	1	1	1	0	0	1	371
DST	1	1	1	1	1	0	0	1	371
NUP	1	1	1	1	1	1	1	1	377
DPSZ	1	1	1	0	1	1	1	1	357
DPIC	1	0	1	1	1	1	1	1	277
DCM	1	0	1	1	1	1	1	1	277
SAM	1	0	1	1	1	1	1	1	277
NOP	1	1	1	1	1	1	1	1	377
SCL	1	1	1	1	1	U	1	U	372
OLD MUY	1	1	0	1	1	0	1	0	332
OLD DVI	1	1	0	1	1	U	1	0	332
NMI	1	1	0	1	1	1	1	1	337
SHL	1	1	1	1	1	0	1	0	372
ASR	1	1	1	1	1	0	1	0	372
LSR	1	1	1	1	1	0	1	0	372
SCA	1	1	1	1	0	1	1	1	367
SCA-SCL	1	1	1	1	0	0	1	0	362
SCA-OLD MUY	1	1	0	1	0	0	1	0	322
SCA-OLD DVI	1	1	0	1	0	0	1	0	322
SCA • NMI	1	1	0	1	0	1	1	1	327
SCA • SHL	1	1	1	1	0	0	1	0	362
SCA • ASR	1	1	1	1	0	0	1	0	362
SCA • LSR	1	1	1	1	0	0	1	0	362

0 INDICATES ACB → LINK DATA AT TS3  
 0 INDICATES TG SLOW → ADD (NOT MERELY SHIFT)  
 0 INDICATES CARRY COUPLE AT TS3 (L → CARRY IN, CARRY OUT → L DATA)  
 0 INDICATES LEFT SHIFT  
 0 INDICATES A SHIFT OPERATION  
 0 DISABLES CPU ADDER LINK GATING  
 0 INDICATES LINK LOAD AT TP3  
 0 INDICATES LOAD SC AT TP2

0 INDICATES ACS  
 0 INDICATES DCM+SAM+DPIC  
 0 INDICATES 0 → SC AT F • TP3  
 0 INDICATES DPSZ  
 0 INDICATES SCA  
 0 INDICATES MA → I → MA, I → SKIP  
 0 INDICATES DSET  
 0 INDICATES ESET

REV	CHANGE NO	DATE
1	1	1/1/71
2	2	1/1/71
3	3	1/1/71

FIRST USED ON OPTION/MODEL KEB-E	QTY.	DESCRIPTION	PART NO	ITEM NO
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRN Date CHK'D DATE	DATE 21 Jan 71	digital CORPORATION MILFORD, MASSACHUSETTS	
DECIMALS	ANGLES	ENG DATE	TITLE	
xxx = .005 xx = .02 x = .1	+0° 30'	PROJ ENG DATE	ROM ENCODING	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY	PROD DATE	DATE 5/1/71		
MATERIAL	NEXT HIGHER ASSY		SIZE CODE	NUMBER
FINISH	A-ML-KEB-E		D	FD KE 3-E-02
SHEET	1 OF 1	DIST		REV A

**DIGITAL EQUIPMENT CORPORATION**  
MAYNARD, MASSACHUSETTS

**ENGINEERING SPECIFICATION**

DATE 2/15/72

TITLE KE8E ACCEPTANCE PROCEDURE

REVISIONS

REV	DESCRIPTION	CHG NO	ORIG	DATE	APPD BY	DATE

**ENGINEERING SPECIFICATION**

CONTINUATION SHEET

TITLE KE8E ACCEPTANCE PROCEDURE

- 1.Ø Equipment Required
  - A. PDP-8E or PDP-8M
  - B. M8340
  - C. M8341
  - D. 3-H851's
  - E. Teletype
  - F. Maindec-8E-DØLB-D-PB KE8E Instruction Test 1
  - G. Maindec-8E-DØMB-D-PB KE8E Instruction Test 2
  - H. Maindec-8E-DØRA-D-PB KE8E Extended Memory Exerciser
  
- 2.Ø Check that the M8340 and M8341 have:
  - A. Proper circuit revision.
  - B. Day code.
  
- 3.Ø Load and run the following diagnostics, consulting the Diagnostic Document for proper operating procedure.
  - A. Maindec-8E-DØLB for two complete program passes which will be indicated by "KE81" being typed out twice.
  - B. Maindec-8E-DØMB for two complete program passes which will be indicated by "KE8E" being typed out twice.
  - C. Maindec-8E-DØRA for five complete program passes which will be indicated by "KE8EME" being typed out five times. At the beginning of the program, be sure to type the correct value defining the maximum amount of memory.
  
- 4.Ø Shipping Hardware
  - A. M8340
  - B. M8341
  - C. 3-H8351's
  
- 5.Ø Shipping Software
  - A. Libkit-8E-KE8E
  - B. KE8E Print Set
  - C. KE8E Maintenance Manual

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

ENG <i>Louis H. G.</i>	APPD <i>John McQuinn</i>	SIZE <b>A</b>	CODE SP	NUMBER KE8-E-0-4	REV
------------------------	--------------------------	---------------	---------	------------------	-----

SIZE <b>A</b>	CODE SP	NUMBER KE8-E-0-4	REV
---------------	---------	------------------	-----



